

Tier Flooring Americas, LLC

TEST REPORT

SCOPE OF WORK

TIER Element PVC-free

REPORT NUMBER

240604006SHF-023

TEST DATE(S)

2024-06-04 - 2024-06-17

ORIGINAL ISSUE DATE

2024-08-01


PAGES

5

DOCUMENT CONTROL NUMBER

LFT-APAC-SHF-OP-10k(February 1, 2024)

© 2024 INTERTEK

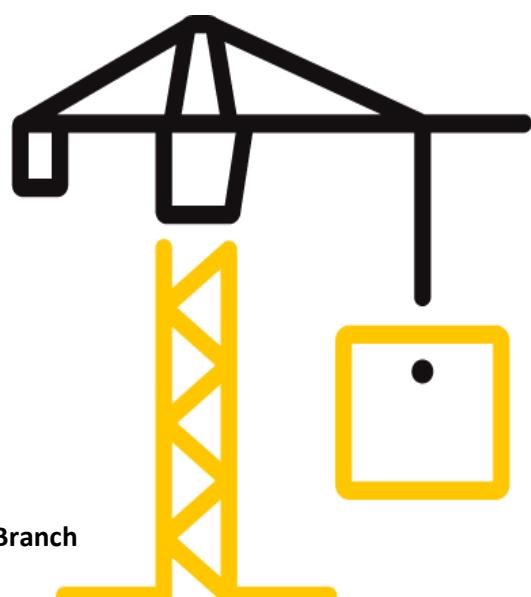

Test Report

Statement

1. This report is invalid without company's special seal for testing on the assigned page.
2. This report is invalid without an authorized person's signature.
3. This report is invalid if altered.
4. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Don't copy this report in partial without any official approval in writing by our company. This report is invalid without re-stamping the special seal for testing in copying report.
5. This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample(s) tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.
6. Except for the obligation, responsibility and liability (if any) for the appropriateness and professionalism of afore-mentioned testing itself within the scope and amount of the testing fee received, Intertek does not and will not accept any other obligation or liability.
7. If the Client has any questions about the test results, Intertek B&C should be informed within the storage period of the samples. The sample storage period ends 5 working days after the official report issue date. Samples of certification program are retained for the period required by the certification rules. The samples storage period shall be calculated according to the issue date of the original report in the case of quoting results and modifying reports.
8. Intertek B&C will service this report for the entire test record retention period. The test record retention period ends 6 years after this report original issue date. The test record retention period for certification program is 10 years. Test records and other pertinent project documentation will be retained for the entire test record retention period.
9. The report was digital signed by Shanghai, Intertek Group plc, please using Adobe Acrobat Reader to verify the authenticity.



Test Report

Original Issue Date: 2024-08-01

Intertek Report No. 240604006SHF-023

Applicant: Tier Flooring Americas, LLC

Address: 8560 Bellevue Drive, Suite 225, Plano, Texas 75024

Attn: Demi

Test Type: Performance test, samples provided by the applicant.

Product Information

Product Name	Model	Specification
TIER Element PVC-free	/	1829*228*7.0mm
Sample ID	Sample Amount	Sample Received Date
S240604006SHF.035	60pcs	2024-06-02
Sample Description		
1829*228*7.0mm		

Test Methods And Standards

Test Standard	ASTM D4060-19
Specification Standard	/
Test Conclusion	The samples were tested according to the above standards, and the results are shown in the following page.

Note:

1. This report does not involve sampling. The report only reflects conformity of the tested items of the samples provided by the testing applicant. Representativeness and authenticity of the submitted samples are responsibilities of the testing applicant.

Report Authorized

Sally Xie



Roger Chen

Name: Sally Xie

Name: Roger Chen

Title: Reviewer

Title: Project Engineer

Test Report

Original Issue Date: 2024-08-01

Intertek Report No. 240604006SHF-023

Test Items, Method and Results:

Test Item: Abrasion/Wear resistance

Test Method: ASTM D4060-19

Conditioning: Condition the test specimens at $(23\pm2)^\circ\text{C}$ and $(50\pm5)\%$ relative humidity for at least 24h

Test Condition:

Rotation frequency: 60 r/min

Abrasive wheels: CS-17

Load on each wheel: 1000 g

Test revolutions: 1000 r

Test Result:

Parameter	Specimen 1	Specimen 2	Specimen 3
Mass/Weight loss, (mg)	47.2	55.2	36.1
Average value, (mg)		46.2	

Note:

1. Abbreviation "r" = revolutions/cycles
2. Test conditions were specified by client.

Test Report

Original Issue Date: 2024-08-01

Intertek Report No. 240604006SHF-023

Appendix A: Sample Received Photo**Revision:**

NO.	Date	Changes
240604006SHF-023	2024-08-01	First issue